


MCR GROUP, INC.

Fiber optic cables type G-657-A2 drop aerial or channeled

Description:

FTTx installations in vertical or horizontal construction projects. Residential and Business segment according to application. LSZH cover with Flame retardants (RoHS) (UL 94 V-0).

Cross section of fiber optic cable:

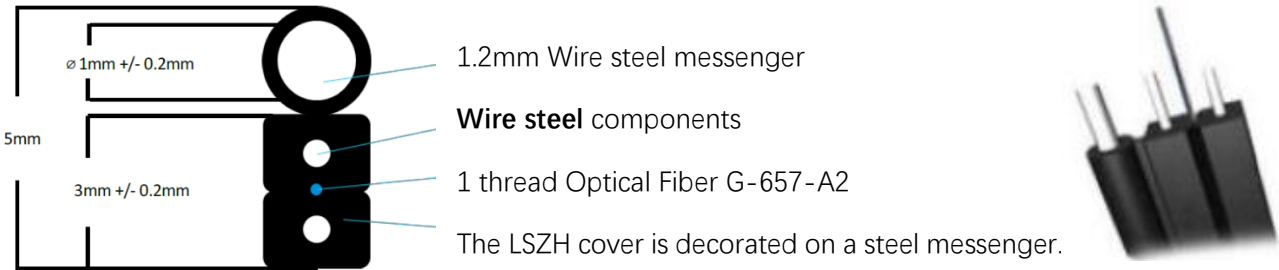

Physical characteristics of Fibra Óptica:

Model No: MCR BDC-1C 03		
Element	Description	
Optical Fiber	Color	Blue
	Diametric	250/900µm
	Norma	G-657 A2
Messenger state	Material	Galvanized steel 1 wire
	Diametric	1.2mm ± 0.2mm
Auxiliary support component	Protection steel diameter	0.5-0.7max ±0.1mm
Jack	Material	LSZH
	Color	Black/ Gray
	Diametric Exterior	5*2*3mm±0.2mm
	Coefficient of friction	0.25
physical strength	Tension (Long Term)	300N
	Tension (Short Term)	600N
	Crushing resistance (Long Term)	1000N/10cm
	Crushing resistance (Short Term)	2200N/10cm
	Min. Bend Radius (Dynamic)	20H
	Min. Bend Radius (Static)	10H
	Installation Temperature	-10 ~ +50
	Operating Temperature	-40°C +60°C
Minimum curvature	Radius 7.5mm	
Flame Retardant Rating	IEC60332-1	
Packaging unit	1000M / Reel	

MCR GROUP, INC.

Fiber optic cables type G-657-A2 drop aerial or channeled.

The characteristics of Optical:

Element		Description
Optical Fiber Type		G.657-A2
Insertion loss connectors	Insertion loss	0.15 dB Typical ≤0.30 dB max
	Typical Reflection	-62dB
Attenuation coefficient	1310nm	≤0.30 dB/Km
	1383nm(after hydrogen aging)	≤0.30 dB/km
	1490nm	≤0.24 dB/km
	1550nm	≤0.20 dB/Km
	1625nm	≤0.23 dB/km
Dispersion	1285nm-1340nm	-3.0ps/(nm·km)-3.0ps/(nm·km)
	1550nm	18ps/(nm·km)
	1625nm	22ps/(nm·km)
PMD	Max. for reel	0.20ps/km ^{1/2}
	Max. link design	0.10ps/km ^{1/2}
Zero-Dispersion slope	0.092ps/(nm ² ·km)	
Zero-Dispersion Wavelength	1300nm-1324nm	
Modal field diameter	8.8±0.4/μm	

Production Line Display(clean room):

